




**TEXAS EQUIPMENT**  
FORT WORTH, TX - USA

**6,000 LB.**

**LOW-RISE**

**PAD LIFT**

*Easy frame lifting on padded runways. Great for wheel and brake work, tire and wheel changing as well as new car preparation.*

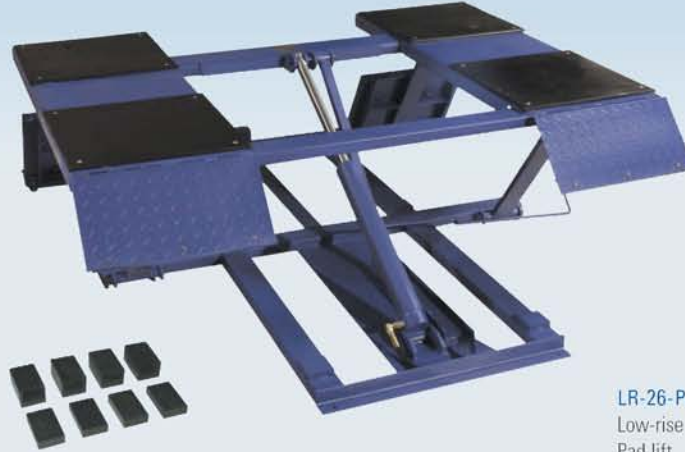

LR-26-PAD  
Low-rise  
Pad lift

**Features:**

- ◆ 6,000 lb. lifting capacity
- ◆ Automatic safety locks
- ◆ Low drive-over height for approach of low vehicles
- ◆ High speed motor lifts from 3"-26" in only 35 seconds
- ◆ 2 sets of rubber riser blocks

**6,000 LB.**

**MID-RISE LIFT**

*Mid-rise models lift cars, vans and light-duty trucks. They are ideal for tire, wheel and brake related repairs, collision repair work and new car preparation.*



MR6K-48  
Mid-rise lift

**Features:**

- ◆ 6,000 lb. lifting capacity
- ◆ Portable trolley supports pump and moves lift
- ◆ Twin hydraulic cylinders and scissors lift design for maximum strength and stability
- ◆ Easily adjustable sliding radius arms
- ◆ Automatic two-position safety locks
- ◆ Swivel pads come standard. Optional drop-in height adapters are also available

SPECIFICATIONS	LR-26-PAD	MR6K-48
Lifting capacity	6,000 lbs.	6,000 lbs.
Overall width	73"	39 5/8" - 57"
Overall length	86"	96 1/2"
Maximum height	26" - 30"	48 1/2" - 54"
Low pad height	NA	7"
Lifting speed	35 sec.	40 sec.
Motor	1 hp/110 vac	1 hp/110 vac
Width between runways	35"	NA
Runway width	19"	NA
Collapsed height	5"	4 3/4"
Shipping weight	1,012 lbs.	950 lbs.

